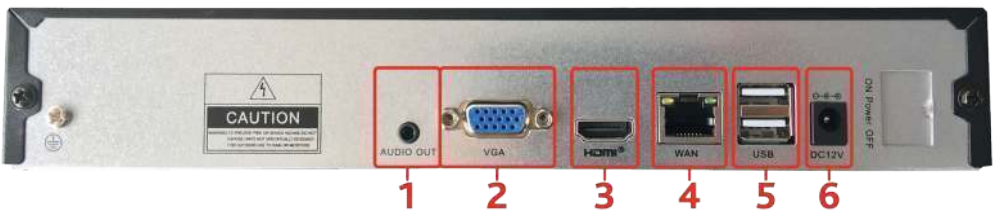# DATASHEET
TRASSIR NVR-1104 V2

TRASSIR NVR-1104 V2 is a network video recorder for building CCTV systems based on IP-cameras. Supports up to 4 channels for record, playback and display.

Rear panel:

1. Audio output
2. VGA interface
3. HDMI interface
4. Network interface
5. USB 2.0 interfaces
6. 12V DC power input

Specification:

Operating system	TRASSIR OS (based on Linux)
IP video input	Up to 4 channels (any models[1])
Resolution of cameras	Up to 6MP (depending on camera model[2])
Bitrate	Up to 36Mb/s
Video compression	H.265 / H.264
Network interfaces	1 Ethernet 10/100 Mb/s
USB interfaces	2 USB 2.0
Maximum internal storage	1 HDD (3.5'' and less than 10W)
Video output	1 VGA and 1 HDMI (duplicate)
Audio inputs/outputs	In: none Out: 1 jack 3.5mm
Remote connection	Connection, live video/ archive viewing using: • TRASSIR Client (one connection in the meantime) • web browser • an Android/iOS app • cloud connection
Dimensions, mm	258 x 206 x 45.5
Power supply	DC 12V
Power consumption	Up to 24W
Working temperature	10…45ºC
Package size, mm	367 x 262 x 75
Net / Gross, kg	0.745 / 1.400

[1] Network Video Recorder supports IP cameras ActiveCam, TRASSIR, Hikvision, HiWatch, Dahua and cameras using ONVIF and RTSP.

[2] You can see list of per-integrated cameras on www.trassir.com.

Basic equipment:

- Network Video Recorder .... 1 pcs.
- Power Supply 12V (5A) .... 1 pcs.
- Mouse .... 1 pcs.
- Datasheet for server .... 1 pcs.

Warranty service:

- Specify the information about the warranty on www.trassir.com.

DATE OF PRODUCTION

SERIAL NUMBER

KEY NUMBER