


# RFID Controller

## For Visionline electronic locking systems

VingCard's RFID Controller for Visionline system can be operated off- or online. The security level of the property will increase, as only guests with a valid keycard will have access.

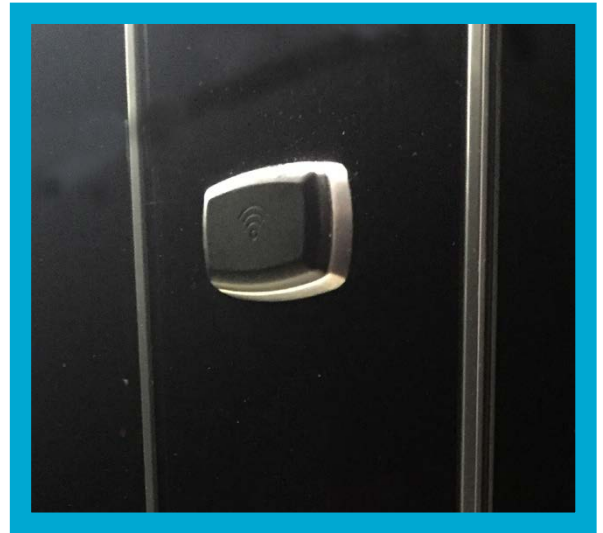

### FEATURES

- : Supports Mobile Access <sup>(1)</sup>
- : Modern and minimalistic design
- : Can also control different devices such as electronic strikes and motor locks as a remote controller.
- : Fully compatible with Visionline system.
- : Ring around the reader can be delivered in all standard VingCard metal finishes.
- : UL-294 certified.
- : RFID Specifications:
  - 13,56MHz technology
  - Compatible with the following standards:
    - ISO 14443 A (MIFARE)
    - ISO 14443 B
    - ISO 15693

1) Mobile Access is available when using a reader that is BLE compatible.

## TECHNICAL DATA

### Power requirements


Maximum current consumption for the reader	150 mA continuously.
Maximum current consumption for each relay module	Maximum current consumption for each relay module.
Maximum load of relay outputs	0,6A@125VAC or 2A@30VDC Resistive.
Each complete unit, supplied individually packed, consists of	RFID Reader with frame in any standard metal finish. 20 m cable. RS-485 Gateway used as relay module and online communication gateway.

### Standards & Certifications

European Low Voltage Directive  
European EMC Directive  
European Radio Equipment Directive  
Federal Communications Commission (FCC)  
Industry Canada (IC)  
UL-294

External power supply must be ordered in addition if needed.

Dimensions:

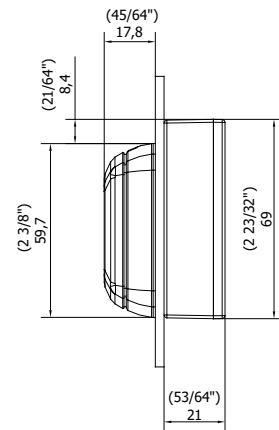

Configuration overview of RFID Controller in an online:

